


TECHNICAL CHARACTERISTICS


PURLINE | wineo 1200 to glue

Permanently elastic polyurethane flooring according to EN 16776
Without the addition of chlorin, without plasticisers or solvents.

wineo

	wood XL V4	stone XL
Format	1500 x 250 mm	1000 x 500 mm
Product thickness	2.2 mm	2.2 mm
Weight	3.0 kg/m ²	3.0 kg/m ²
Planks / m² per box	14 / 5.25 m ²	12 / 6.00 m ²
Boxes / m² per pallet	56 / 294.00 m ²	50 / 300.00 m ²
Guarantee	You can find our guarantee conditions at – www.wineo.de	

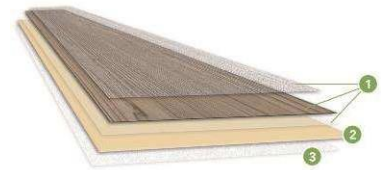

Classification		Product composition	
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage	1 Top element • PU-top layer with surface structure • decor paper • stabilisation
	Utilization class 33 EN ISO 10874	Commercial sector with heavy usage	
	Utilization class 42 EN ISO 10874	Light industry sector with moderate usage	
	Scratch resistance EN 16776, annex A	Utilization class 33 ≥ 6 N Utilization class 42 ≥ 7 N	2 Base layer high performance composite
	R9 Anti slip category DIN 51130	R 9	3 Backing Integrated Fleece TEC-System
	Staining and chemical resistance EN ISO 26987	Very good resistance according to the concentration and residence time	wood XL V4 joint lacquered 
	Light fastness EN ISO 105-B02	~ 7	 
	Residual indentation EN ISO 24343-1	≤ 0.10 mm	
	Effect of a furniture leg EN 424	Foot type 2 – no visible change	
	Castor chair test EN ISO 4918	25000 revolutions no damage with rolls type W	 
	Thermal resistance ISO 8302	0.01 (m ² K)/W	
	Impact sound reduction EN ISO 10140	~ 8 dB	
	Dimension stability EN ISO 23999	≤ 0.15 %	 
	Flexural behaviour EN ISO 24344	≥ 20 mm	
	REACH	free from SVHC substances ≥ 0.1 %	
	Disposal	<u>Private:</u> possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203	  



Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperatur of 29 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.